

Technical specification:

Rated voltage: 3pos 4pos
IEC 61076-2-104 60 V 30 V

Current rating: 3 A bei 40°C
IEC 61076-2-104

Insulation resistance: >=100 MΩ
IEC 60512

Pollution degree: 3/2
IEC 60664-1




Degree of protection: IP 67, in mated condition
IEC 60529

Temperature range: -30°C ... +85°C
IEC 60664-1

Mating cycles: >=100
IEC 60512-9a

Materials:

Contact: CuZn
Contact plating: Nickel, gold plated
Contact carrier: PA , UL 94
Socket housing: CuZn, Nickel plated

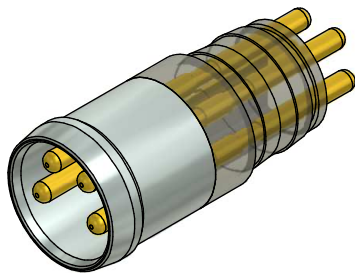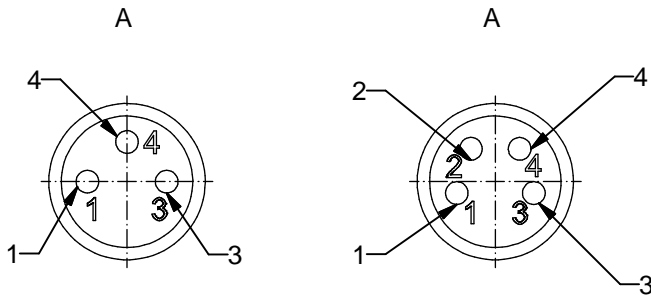

Part no:	Description:	Pos
42-01010	SAL - 8 - ESTM3 - P	3
42-01011	SAL - 8 - ESTM4 - P	4

DO NOT ALTER CAD DRAWING BY HAND Directive 2002/95/EC RoHS compliant	Index: b 02.03.11 fro Ä3914 Data sheet revised	dim. in mm	title: Male socket M8x1 with dip solder		
			date	name	dwg no: 42K1A115
		drawn	15.10.08	Fromm	
		appd.	15.10.08	Mankopf	
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH			CONEC ®		