
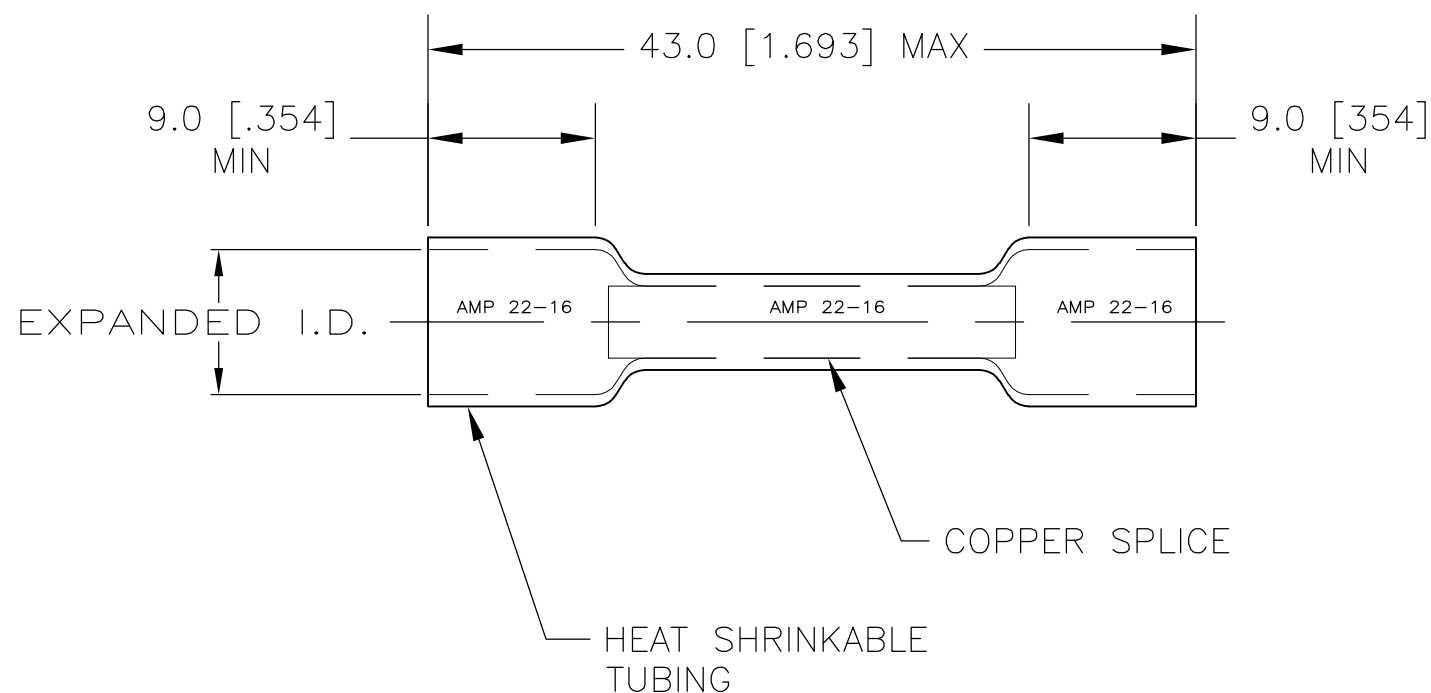


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|-----------------------|---------|-----|------|
| EY | 25 | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | | N | REV PER ECR 07-027142 | 12NOV07 | JR | TM |

| | |
|--------------------------|--|
| AMP WIRE RANGE |  Listed |
| 22-16 AWG STRANDED | 22-16 AWG STRANDED |



- 1 TUBING MATERIAL; CROSS-LINKED POLYMER WITH MELT LINER; COLOR, RED; BLACK INK LEGEND 1/16 MIN; HEIGHT; ONE FULL APPEARANCE MIN.
- 2 TEMP RATING -65°F TO 257°F [-55°C TO 125°C]
- 3 NO AGENCY APPROVALS, NEITHER UL OR CSA APPROVED.
- 4 SHIPPING WEIGHT .003 LBS EACH
- 5 VOLTAGE RATING: 600 V MAX (1000 V MAX FIXTURES & SIGNS)
- 6 MATERIAL & FINISH ; BODY - COPPER, TIN PLATED SLEEVE - NYLON
- 7 PRELIMINARY - NOT FOR PRODUCTION

| | | | | | | |
|---|---------------|-------------------|--------------------|--------|---|------------|
| 3 | ON TAPE, REEL | 4.44 [.175] | 1.65 [.065] | 2500 | 7 | 2-603502-1 |
| | LOOSE PIECE | 4.44 [.175] | 1.65 [.065] | 1000 | | 603502-3 |
| | SMALL PACK | 4.44 [.175] | 1.65 [.065] | 50/BOX | | 603502-2 |
| | PACKAGE TYPE | EXPANDED I.D. MIN | RECOVERED I.D. MAX | QTY | | PART NO. |

| | | | | |
|--|--|----------------------------------|---|--------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN JR RUTH 24JUN04 | Tyco Electronics Corporation Harrisburg, Pa 17105-3608 | |
| DIMENSIONS: mm [INCHES] | | CHK T MICHIELUTTI 24JUN04 | NAME PRE-INSULATED SEALED SPLICE WIRE SIZE: 22-16 AWG | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.51 [.02] 3 PLC ± 0.13 [.005] 4 PLC ± - ANGLES ± - | | APVD T MICHIELUTTI 24JUN04 | PRODUCT SPEC - | |
| MATERIAL - 6 | | FINISH - 6 | APPLICATION SPEC - | RESTRICTED TO - |
| - | | WEIGHT - | SIZE A3 | CAGE CODE 00779 |
| CUSTOMER DRAWING | | DRAWING NO G-603502 | SCALE 1:1 | |
| | | SHEET 1 OF 1 | | REV N |